


# **KOOLITE**A Safer Loading Dock Light

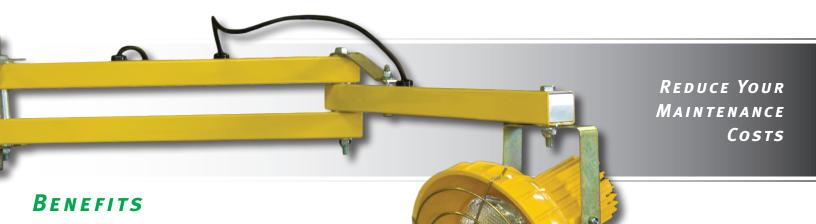

## ➤ ULTRA-DURABLE

High-impact polycarbonate head is indestructible under normal industrial use, eliminating the need for frequent, costly repairs and allows maintenance crews to be more productive.

Shock-resistant head weighs 50% less than conventional metal heads and bulb\* is protected by wire guard.

\*Bulb not included.

# ➤ QUALITY CONSTRUCTION

Safety yellow powder coating finish promotes high-visibility and is rust resistant.

Anchors with sturdy, all-metal bracket and four 7/16" mounting holes to spread weight and transfer load.

Arms made from 1-1/2'', 14-gauge square steel tubing in a double-strut design, extending 40'' for stability.

# ➤ IMPROVES SAFETY

Many workers have been burned when touching a hot head lamp. Our "Kool" polycarbonate head resists high heat build up that is typical of conventional dock light heads.

➤ SAFETY REQUIREMENTS
CSA certified.

# SPECIFICATIONS

# **MODEL DL-40**

- ➤ Extended: 40" (1016 mm) extension
- ➤ Retracted: 22 1/2" (572 mm) extension x 14" (356 mm) high
- ➤ 110 Volts
- ➤ Uses 120 watt max. Type PAR-38 Lamp only
- ➤ Shipping weight: 15 lbs. (6.8 kg.)

# **MODEL DL-60**

- ➤ Extended: 60" (1523 mm) extension
- ➤ Retracted: 22 1/2" (572 mm) extension x 14" (356 mm) high
- ➤ 110 Volts
- ➤ Uses 120 watt max. Type PAR-38 Lamp only
- ➤ Shipping weight: 20 lbs. (9.1 kg.)

### LOADING DOCK COMPANY (LDC) LTD.